

Cisco 5000 Enterprise Network Compute System

The Cisco[®] 5000 Enterprise Network Compute System is a compute appliance family designed for a virtualized, software-defined network architecture. The system offers service flexibility, performance, and lower total cost of ownership for the next-generation branch office.

Product Overview

The Cisco 5000 Enterprise Network Compute System (ENCS) is a line of compute appliances designed for the Cisco Enterprise Network Functions Virtualization (ENFV) solution. It delivers a new standard of software-defined flexibility and performance, and offers a low Total Cost of Ownership (TCO). The 5000 ENCS is a hybrid platform that combines the best attributes of a traditional router and a traditional server, and offers the same functionality with a smaller infrastructure footprint. Offered with the Cisco Integrated Services Virtual Router (ISRv) and NFV Infrastructure Software (NFVIS) as the hosting layer, the platform offers a complete solution for a simplified deployment. It also accelerates some functions in hardware such as inter-VM traffic flows, IP Security (IPsec) crypto, and RAID for storage. Built-in lights-out management is also supported with Cisco Integrated Management Controller on certain models.

Figure 1 shows the Cisco 5000 Enterprise Network Compute System family. The Cisco 5400 ENCS consists of three models: the 5412, 5408, and 5406. The Cisco 5100 ENCS consists of one model: the 5104. It is available in three storage-capacity variants.

Figure 1. Cisco 5000 Enterprise Network Compute System Family




Cisco Enterprise NFV delivers a fully functional virtualized solution for network and related application services. The main building blocks of the solution include:

- An orchestration environment to allow easy automation of the deployment of virtualized network services, consisting of multiple Virtualized Network Functions (VNF)
- The VNFs, which provide the desired network functionality, or even non-networking software applications, required at a deployment location
- The NFV Infrastructure Software platform to facilitate the deployment and operation of VNFs and hardware components

- x86-based compute resources, such as the Enterprise Network Compute System, to provide the CPU, memory, and storage required to deploy and operate VNFs and run applications

Figure 2 shows the main components of Cisco's Enterprise NFV solution.

Figure 2. Enterprise NFV Building Blocks

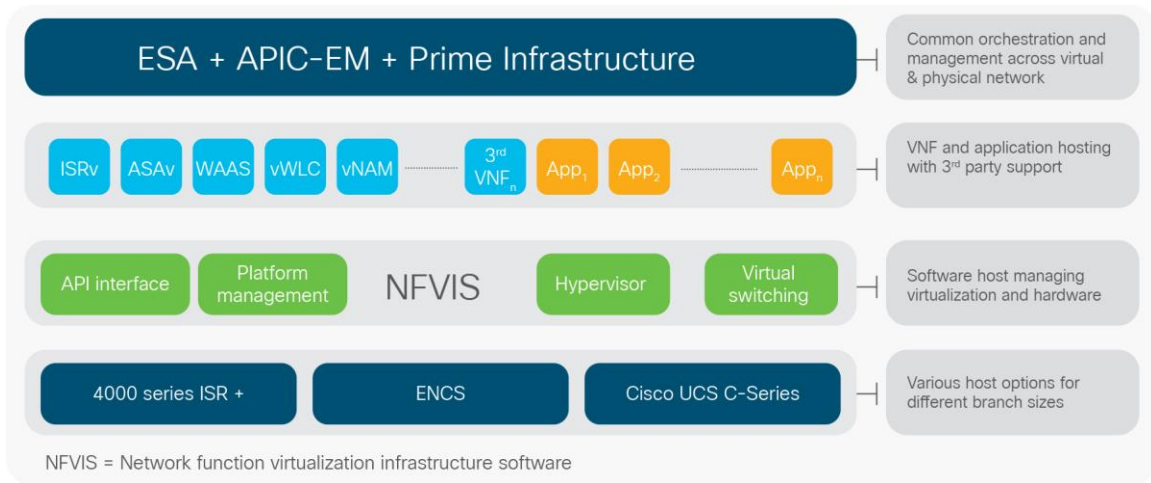

For more information on the Cisco Enterprise NFV solution, visit <https://www.cisco.com/c/en/us/solutions/enterprise-networks/enterprise-network-functions-virtualization-nfv/index.html>.

Platform Architecture Highlights

Table 1 lists the primary hardware architectural features and benefits of the 5000 systems. The software's comprehensive portfolio of services spans multiple technology areas, including security, WAN optimization, application and network Quality of Service (QoS), and embedded management.

Table 1. Architectural Highlights

Architectural Features	Benefits/Description
End-to-end easily deployable solution	<ul style="list-style-type: none"> • Vertically integrated solution with industry-leading software – includes Cisco ISRV, NFV Infrastructure Software, Virtual Wide-Area Applications Services (vWAAS), Virtual Adaptive Security Appliance (ASAv), and Virtual Wireless LAN Controller (vWLC) • Broad range of VNFs from Cisco; open to third-party VNFs • Centralized orchestration with Cisco Enterprise Services Automation and Virtual Managed Services (vMS)
Multicore processor options	<ul style="list-style-type: none"> • Choice of high-performance Intel® Xeon® D-1500 Series or AMD Embedded R-Series SOC RX-421ND processors that can be picked for a specific application workload with room to expand for future growth
Form factor	<ul style="list-style-type: none"> • High-density functionality in a 1-rack-unit and 12-inch-deep appliance with ENCS 5400 Series, or 10-inch-deep appliance with ENCS 5100 Series • Enterprise Network Compute System will have the same 6- to 8-year lifecycle as a traditional ISR, with enterprise-grade components tested for a wide range of environments • Enterprise Network Compute System also offers standard components like our traditional routers, such as mounts and a range of power cables
Hardware offload and acceleration	<ul style="list-style-type: none"> • Optional hardware offload for VM-to-VM traffic, supported by an Intel XL710 Ethernet Controller • Optional hardware RAID controller for external drive bays
Integrated management controller (ENCS 5400 Series)	<ul style="list-style-type: none"> • Built-in lights-out server management through the Cisco Integrated Management Controller, which runs on the same dedicated baseboard management controller hardware found in all Cisco UCS® products. • This feature provides standalone management consistency with Cisco UCS E-Series blade servers and Cisco UCS C-Series rack servers for both local and remote server monitoring and configuration management

Architectural Features	Benefits/Description
Integrated GE WAN and LAN ports	<ul style="list-style-type: none"> • 2 to 4 Gigabit Ethernet (GE) WAN or LAN port (dual-mode RJ-45 and SFP) • Built-in 8-port GE LAN switch with PoE capability on ENCS 5400 Series • GE management port for an Intel x86 host
Optional integrated power supply for distribution of PoE (ENCS 5400 Series)	<ul style="list-style-type: none"> • An optional upgrade to the internal power supply provides inline power (802.3af-compliant PoE or 802.3at-compliant PoE+) to optional integrated switch modules • Supported on the 5412 and 5408 Enterprise Network Compute Systems only
Cisco network interface modules (NiMs) (ENCS 5400 Series)	<ul style="list-style-type: none"> • Supports traditional WAN interfaces, 4G LTE, and LAN or WAN GE ports; includes the same slot form factor that is available on 4000 Series ISRs • Provides flexibility for a phased transition to a fully Ethernet-based connectivity • NiMs support Online Insertion and Removal (OIR)
Storage	<ul style="list-style-type: none"> • Multiple storage options, including on-board motherboard storage for smaller requirements, and extensible with external disk bays for larger storage for WAN optimization, local servers, and physical security

Product Specifications

Figure 3 shows the front and back of the Cisco 5400 Enterprise Network Compute System platform.

Figure 3. Cisco 5400 Enterprise Network Compute System – Front and Back



Figure 4 shows the front and back of the Cisco 5100 Enterprise Network Compute System platform.

Figure 4. Cisco 5100 Enterprise Network Compute System – Front and Back



Tables 2 and 3 list the general product specifications for the Cisco 5000 ENCS.

Table 2. Specifications for the Cisco 5000 Enterprise Network Compute System

Technical Specifications	Cisco 5400 ENCS	Cisco 5100 ENCS
CPU	Intel Xeon Broadwell DE Processor D-1500 Family <ul style="list-style-type: none"> ENCS5412: Intel Xeon Processor D-1557 (12-core, 1.5 GHz, and 18 MB L2 cache) ENCS5408: Intel Xeon Processor D-1548 (8-core, 2.0 GHz, and 12 MB L2 cache) ENCS5406: Intel Xeon Processor D-1528 (6-core, 1.9 GHz, and 9 MB L2 cache) 	AMD Embedded R-Series SOC RX-421ND <ul style="list-style-type: none"> ENCS 5104: 4-core, 3.4 GHz, 2 MB L2 cache
DRAM	<ul style="list-style-type: none"> 2 DIMM slots, each with 8, 16, or 32 GB ECC DDR4 RAM 16 GB default single DIMM 64 GB maximum system capacity 	<ul style="list-style-type: none"> 2 DIMM slots, each with 16 GB ECC DDR4 RAM 16 GB default single DIMM 32 GB maximum system capacity
Motherboard storage	M.2 SATA – 64 GB (default), 200 GB, and 400 GB options	M.2 SATA – 64 GB (default), 200 GB, and 400 GB options
Disk drives (SFF)	Up to 2 Small Form Factor (SFF): <ul style="list-style-type: none"> 7200-rpm SATA: 1 TB, 2 TB 10000-rpm SAS SED: 1.2 TB 10000-rpm SAS: 1.8 TB SATA SSD eMLC: 480 GB, 960 GB 	Not applicable
RAID options	Optional hardware LSI MegaRAID SAS 3108 Controller	Not applicable
Total onboard WAN or LAN ports	<ul style="list-style-type: none"> 2 GE WAN or LAN port (dual-mode RJ-45 and SFP) Built-in 8-port GE LAN switch with PoE capability GE management port for Intel x86 Host 	<ul style="list-style-type: none"> 2 GE WAN or LAN port (dual-mode RJ-45 and SFP) 2 GE WAN or LAN port (RJ-45) GE management port for Intel x86 Host
NIM slots	1	Not applicable
OIR (all I/O modules)	Yes	Not applicable
External USB 2.0 slots (type A)	1	2
Serial console port	RJ-45 (up to 115.2 Kbps)	RJ-45 (up to 115.2 Kbps)
Power-supply options	Single, internal: AC and PoE PoE support is available on 5408 and 5412 Enterprise Network Compute System models only.	Single, internal: AC
AC input voltage	100 to 240 VAC auto-ranging	100 to 240 VAC auto-ranging
AC input frequency	47 to 63 Hz	50 to 60 Hz
AC input current range, AC power supply (maximum)	3.8 to 1.3A	1.5A
AC input surge current	60A peak and less than 5 arms per half cycle	60A peak and less than 5 arms per half cycle
Typical power (no modules) (Watts)	125W	90W
Maximum power with AC power supply (Watts)	180W (no PoE)	100W
Maximum power with PoE power supply (platform only; Watts)	380W with PoE	100W
Total PoE budget	200W Platform supports Universal PoE (60W maximum per LAN port)	Not applicable
Dimensions (H x W x D)	1.73 x 17.25 x 13.3 in (includes power supply unit and NIM mounts) (4.4 x 43.8 x 33.8 cm)	1.73 x 12.7 x 10 in (4.4 x 32.3 x 25.4 cm)

Technical Specifications	Cisco 5400 ENCS	Cisco 5100 ENCS
Shipping box dimensions (H x W x D)	6.8 x 16.1 x 21.5 in (17.3 x 40.9 x 54.6 cm)	4.9 x 18.4 x 13.7 in (12.4 x 47.3 x 34.6 cm)
Rack height	1 Rack Unit (1RU)	1 rack unit (1RU)
Rack-mount 19 in. (48.3 cm) EIA	Optional	Optional
Rack-mount 23 in. (58.4 cm) EIA	Optional	Optional
Wall mount	Optional	Optional
Weight	13.0 lb (5.9 kg) without modules or external drives	6.6 lb (3.0 kg)
Airflow	I/O side to bezel side	Bezel to I/O side
Temperature	32° to 104°F (0° to 40°C)	32° to 104°F (0° to 40°C)
Altitude (China)	0–6560 ft. (0–2000 m)	0–6560 ft. (0–2000 m)
Altitude (All worldwide locations except China)	0–10,000 ft. (0–3050 m)	0–10,000 ft. (0–3050 m)
Relative humidity	10% to 90%	10% to 90%
Short-term humidity	5% to 95%, not to exceed 0.024 kg water/kg of dry air	5% to 95%, not to exceed 0.024 kg water/kg of dry air
Acoustics: Sound pressure (typical/maximum)	45.2/61 dBA	29.9/42.8 dBA
Acoustics: Sound power (typical/maximum)	58.2/78.8 dBA	41/54 dBA
Non-operating temperature	-4° to 158°F (-20° to 70°C)	-4° to 158°F (-20° to 70°C)
Non-operating relative humidity	5% to 95%	5% to 95%
Non-operating altitude	-1000 ft (-304 m) to 15,584 ft (4750 m)	-1000 ft (-304 m) to 15,584 ft (4750 m)
Safety	UL 60950-1 CAN/CSA C22.2 No. 60950-1 EN 60950-1 AS/NZS 60950-1 IEC 60950-1	UL 60950-1 CAN/CSA C22.2 No. 60950-1 EN 60950-1 AS/NZS 60950-1 IEC 60950-1
EMC	47 CFR Part 15 KN 32 EN 55032 CISPR 32 EN61000-3-2 EN61000-3-3 EN 300 386 ICES-003 VCCI V3 TCVN 7189 CNS13438 CISPR24 EN55024 KN35 TCVN 7317	47 CFR Part 15 KN 32 EN 55032 CISPR 32 EN61000-3-2 EN61000-3-3 EN 300 386 ICES-003 VCCI V3 TCVN 7189 CNS13438 CISPR24 EN55024 KN35 TCVN 7317

Technical Specifications	Cisco 5400 ENCS	Cisco 5100 ENCS
Telecom	T1 IC CS-03:2004 TIA-968-B:2009 HKTA 2028:2010 HKTA 2017:2010 HKTA 2015: 2006 G.703:2001 ID0002:2007 IS6100:2004 DSPR Gray Book:2000 DSPR Technical Condition: 2004 E1 AS/ACIF S016: 2001 AS/ACIF S038: 2001 G.703:2001 TBR 4:1995 TBR 12:1993 TBR 13:1996 RRA 2009-38 (RRL 2005-96) IDA TS DLCN:2011 IDA TS ISDN PRA:2005 IS6100: 2004 PTC 220:2008 Ethernet IEEE 802.3 ANSA X3.263	Ethernet IEEE 802.3 ANSA X3.263

Table 3. Cisco Integrated Management Controller for the 5400 Enterprise Network Compute System

Feature	Description
Integrated Management Controller	<ul style="list-style-type: none"> • Integrated Emulex Pilot-3 Board Management Controller (BMC) • IPMI 2.0-compliant for management and control • CLI and web GUI management tool for automated, lights-out management
Software version	<ul style="list-style-type: none"> • Cisco IMC Version 3.1.3+
Storage	<ul style="list-style-type: none"> • 8 GB eMMC
Networking	<ul style="list-style-type: none"> • Front-panel RJ-45 Ethernet management port (10/100/1000 BASE-T) • Shared LAN-On-Motherboard (LOM) support with front-panel GE WAN ports
Display	<ul style="list-style-type: none"> • Front-panel VGA
USB	<ul style="list-style-type: none"> • External USB 3.0 Type A
Serial console port	<ul style="list-style-type: none"> • RJ-45 (up to 115.2 kbps)
KVM	<ul style="list-style-type: none"> • Integrated virtual Keyboard, Video, and Mouse (KVM) support

Ordering Information

The Cisco 5000 Enterprise Network Compute System is orderable and shipping. Refer to the ordering guide for detailed information on the hardware, software, and support options. To place an order, visit the [Cisco Ordering webpage](#). To download software, visit the [Cisco Software Center](#).

The 5000 Enterprise Network Compute System is included in the standard Cisco Technology Migration Program (TMP). Refer to [the guide](#) and contact your local Cisco account representative for program details.

The 5000 Enterprise Network Compute System Integrated Services Routers have a 90-day limited liability warranty.

Cisco and Partner Services for the Branch Office

Services from Cisco and our certified partners help you transform the branch-office experience and accelerate business innovation and growth. We have the expertise to create a clear, replicable, optimized branch-office footprint across technologies. Planning and design services align technology with your business goals and can increase deployment efficiency. Technical services help you improve operational efficiency, save money, and mitigate risk. Optimization services help you continuously improve performance and succeed with new technologies. For more information, visit <https://www.cisco.com/c/en/us/services/overview.html>.

Cisco technical support for the Cisco 5000 Enterprise Network Compute System is available on a one-time or annual contract basis. Support options range from help-desk assistance to proactive, onsite consultation. All support contracts include:

- Major software updates for protocol, security, bandwidth, and feature improvements
- Full access rights to Cisco.com technical libraries for technical assistance, electronic commerce, and product information
- 24-hour daily access to the industry's largest dedicated technical support staff

Cisco Capital

Financing to Help You Achieve Your Objectives

Cisco Capital can help you acquire the technology you need to achieve your objectives and stay competitive. We can help you reduce CapEx. Accelerate your growth. Optimize your investment dollars and ROI. Cisco Capital financing gives you flexibility in acquiring hardware, software, services, and complementary third-party equipment. And there's just one predictable payment. Cisco Capital is available in more than 100 countries. [Learn more.](#)

For More Information

For more information about the Cisco 5000 Enterprise Network Compute System, visit <https://www.cisco.com/c/en/us/solutions/enterprise-networks/enterprise-network-functions-virtualization-nfv/index.html> or contact your local Cisco account representative.



Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at <https://www.cisco.com/go/offices>.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)